佛山松川珠冠智能装备有限公司

地址：佛山市顺德区陈村镇广隆工业园环镇东路3号
邮编：528313
电话：0757-29833088
传真：0757-29833099

松川珠冠华东区域销售处
地址：上海青浦工业园区崧泽大道9881号
邮编：201700
电话：021-69213288
手机：15821211374

松川珠冠华南区域销售处
地址：广东省佛山市顺德区陈村镇广隆工业园环镇东路3号
邮编：528000
电话：0757-29833088-8888
手机：13929139669

松川珠冠华西区域销售处
地址：四川省成都市温江区金马镇檬桥路518号
邮编：610091
电话：028-82688211
手机：15196662909

松川珠冠华中/华北区域销售处
地址：河南省郑州市荥阳豫龙镇居易世界观二期9号
楼2单元204室
邮编：450000
手机：18037186816

佛山松川珠冠智能装备有限公司

FOSHAN SOONTRUE ZHUGUAN INTELLIGENT EQUIPMENT CO., LTD.

全伺服智能包装系统推广方案

Promotional Programs For Automatic Distribution Assortment Packaging System

公司组织

松川企业由佛山市松川机械设备有限公司、上海松川远亿机械设备有限公司、上海松川峰冠包装自动化有限公司、成都松川雷博机械设备有限公司、上海松昂智能科技有限公司、上海松骥智能科技有限公司、佛山松川珠冠智能装备有限公司七家组成的集团性公司，总部设立在上海市青浦工业园区。企业下辖上海、天津、郑州、晋江、佛山、成都等分公司，并在全国范围内设有三十多家服务网点。

Soontrue松川®
自在为先

公司属下企业

上海松川远亿机械设备有限公司

集研发、制造、销售于一体，专业生产食盐、烘培、炒货、速冻、乳品、医药化工等行业的立式包装机械、给袋式包装机械、多列包装机械、理料生产线、装箱及码垛等设备。

成都松川雷博机械设备有限公司

集研发、制造、销售于一体，专业生产速冻、烘焙食品加工机械及食品加工自动化生产线。

佛山市松川机械设备有限公司

集研发、制造、销售于一体，专业生产烘培、炒货、速冻、医药化工的包装机械、理料生产线、装箱及码垛等设备。

上海松川峰冠包装自动化有限公司

集研发、制造、销售于一体，专业生产生活用纸行业后加工全自动包装机械、装箱机械及码垛等设备。

01/02

上海松川远亿机械设备有限公司

佛山市松川机械设备有限公司

成都松川雷博机械设备有限公司

佛山公司简介

松川见证了包装制造业二十七年的历史，建立了上海、佛山、成都三大基地，产品立足在烘焙、休闲食品、医药乳品、盐化、生活用纸等行业。松川矢志于：整线包装系统的解决方案，全伺服系统的应用让生产商达到极致超凡、高效完美的体验。我们将为创新与智能，赋能工业自动化未来奋发图强，共创辉煌！

目录

松川简介 01

佛山松川简介 03

部门简介 05

枕式包装机 09

理料包装生产线 35

部门简介

全面的研发制造能力，全面的服务跟进能力，以实现客户价值为核心的自动化生产线和全方位服务。

SZ-100
三伺服智能枕式包装机

智能化程序/便捷性操作/高精度高速度

适用物料 APPLCAITION

适用于烘焙食品（月饼、面包、饼干等）、医疗器械、糖果、药品、日用品、五金零件、纸盒或托盘等各类固态有规则物体的包装。

It is suitable for baking food (moon cake, bread, biscuit, etc.), medical equipment, candy, medicine, daily necessities, hardware parts, paper box or tray and other solid and regular packing.

三伺服智能枕式包装机 SZ-100
SERVO INTELLIGENT PILLOW TYPE PACKING MACHINE

技术参数 TECHNICAL PARAMETERS

型号 Model	SZ-100（单刀/Single jaw）	SZ-100（双刀/Double jaws）	SZ-100（三刀/Triple jaws）
包装规格长 Package length	120~300 mm	60~200 mm	45~120 mm
包装规格宽 Package width	35~80 mm	35~80 mm	35~70 mm
包装规格高 Package height	5~35 mm	5~35 mm	5~30 mm
包装速度 Packing speed	30~150 bags/min	30~250 bags/min	30~450 bags/min
包装膜宽 Film size	90~220 mm	90~220 mm	90~220 mm
包装膜类型 Packaging film type	PP、PE、PVC、PS、EVA、PET、PVDC+PVC、OPP+复合CPP等		
电源类型 Type of power supply	220V 50HZ	220V 50HZ	220V 50HZ
总功率 General power	3.1 Kw	3.8 Kw	4.5 Kw
整机重量 Weight	360 Kg	360 Kg	360 Kg
机身尺寸（含尾架）Dimension	4000×930×1370 mm		

性能特点 PERFORMANCE CHARACTERISTICS

- 整机由三个伺服控制；
  The whole machine is controlled by three servos;
- 七寸触摸屏显示，操作简易，工作状态清晰明了；
  Seven-inch touch screen display, easy operation and clear working status;
- 可以存储多种产品参数和配方，不需重复设置，下载即可使用；
  A variety of product parameters and formulas can be stored, which can be downloaded and used without repeated settings;
- 自动调整袋长，不需人工设置；
  Automatic adjustment of bag length without manual setting;
- 精度更高，封切位置准确；
  Higher precision and accurate sealing and cutting position;
- 停机位置，打印位置可任意设置；
  Stop position and print position can be set arbitrarily;
- 机械结构简单，调试方便直观，售后维护成本低；
  Simple mechanical structure, convenient and intuitive debugging and low after-sales maintenance cost;
- 包装范围扩宽，适应多种产品规格；
  The packaging range is expanded to adapt to a variety of product specifications;
- 符合人体工程力学的结构布局，可方便迅速对机器进行卫生清理，保养，维护，检修；
  In line with the structure of human engineering mechanics, can be convenient to quickly clean up, maintenance, overhaul of the machine;
- 降低操作者的劳动强度，有效提高生产效率。
  Reduce the labor intensity of the operator, effectively improve production efficiency.

SZ-180
三伺服智能枕式包装机

高精高速/便捷稳定

适用物料 APPLCAITION

适用于烘焙食品（月饼、面包、饼干等）、医疗器械、糖果、药品、日用品、五金零件、纸盒或托盘等各类固态有规则物体的包装。

It is suitable for baking food (moon cake, bread, biscuit, etc.), medical equipment, candy, medicine, daily necessities, hardware parts, paper box or tray and other solid and regular packing.

三伺服智能枕式包装机 SZ-180
SERVO INTELLIGENT PILLOW TYPE PACKING MACHINE

技术参数 TECHNICAL PARAMETERS

型号 Model	SZ-180（单刀/single pole）	SZ-180（双刀/single pole）	SZ-180（三刀/three pole）
包装规格长 Long	60~500 mm	60~350 mm	45~100 mm
包装规格宽 Wide	35~160 mm	35~160 mm	35~60 mm
包装规格高 High	5~60 mm	5~60 mm	5~30 mm
包装速度 speed	30~150 bags/min	30~300 bags/min	30~500 bags/min
包装膜宽 Width of packaging	90~400 mm	90~400 mm	90~400 mm
包装膜类型 Packaging film type	PP、PVC、PE、PS、EVA、PET、PVDC+PVC等		
电源类型 Type of power supply	220V 50HZ	220V 50HZ	220V 50HZ
总功率 General power	5.0 Kw	6.5 Kw	5.8 Kw
整机重量 Whole machine weight	400 Kg	400 Kg	400 Kg
机身尺寸（含尾架）Dimension	4000×930×1370 mm		

性能特点 PERFORMANCE CHARACTERISTICS

- 整机由三个伺服控制；
  The whole machine is controlled by three servos;
- 七寸触摸屏显示，操作简易，工作状态清晰明了；
  Seven-inch touch screen display, easy operation and clear working status;
- 可以存储多种产品参数和配方，不需重复设置，下载即可使用；
  A variety of product parameters and formulas can be stored, which can be downloaded and used without repeated settings;
- 自动调整袋长，不需人工设置；
  Automatic adjustment of bag length without manual setting;
- 精度更高，封切位置准确；
  Higher precision and accurate sealing and cutting position;
- 停机位置，打印位置可任意设置；
  Stop position and print position can be set arbitrarily;
- 机械结构简单，调试方便直观，售后维护成本低；
  Simple mechanical structure, convenient and intuitive debugging and low after-sales maintenance cost;
- 包装范围扩宽，适应多种产品规格；
  The packaging range is expanded to adapt to a variety of product specifications;
- 符合人体工程力学的结构布局，可方便迅速对机器进行卫生清理，保养，维护，检修；
  In line with the structure of human engineering mechanics, can be convenient to quickly clean up, maintenance, overhaul of the machine;
- 降低操作者的劳动强度，有效提高生产效率。
  Reduce the labor intensity of the operator, effectively improve production efficiency.

SZ-180L
三伺服智能枕式包装机

高精高速/结构简单

适用物料 APPLCAITION

适用于大规格大重量月饼、面饼等烘焙食品，或更大尺寸产品的包装。

It is suitable for packing large size and weight baked goods such as moon cakes and cakes, or larger size products.

三伺服智能枕式包装机 SZ-180L

SERVO INTELLIGENT PILLOW TYPE PACKING MACHINE

技术参数 TECHNICAL PARAMETERS

型号 Model	SZ~180L
包装规格长 Package length	120~500 mm
包装规格宽 Package width	35~200 mm
包装规格高 Package height	5~60 mm
包装速度 Packing speed	30~150 bags/min
包装膜宽 Film size	90~400 mm
包装膜类型 Packaging film type	PP、PE、PVC、PS、EVA、PET、PVDC+PVC、OPP+复合CPP等
电源类型 Type of power supply	220V 50HZ
总功率 General power	3.8 Kw（双温控）
整机重量 Weight	450 Kg
机身尺寸（含尾架）Dimension	4200×930×1370 mm

性能特点 PERFORMANCE CHARACTERISTICS

- 整机由三个伺服控制
  The machine is controlled by three servos;
- 中封带下输送，可通过更重（≥300g）物料；毛扫可使包膜更平整且达到排气需求；刀座可通过更大尺寸物料；
  Conveying under the middle sealing belt, can pass more heavy (≥300g) materials;The sweeping can make the envel;
- 七寸触摸屏显示，操作简易，工作状态清晰明了；
  7-inch touch screen display, easy to operate, clear working state;
- 可以存储多种产品参数和配方，不需重复设置，下载即可使用；
  Can store a variety of product parameters and formulations, do not need to set repeatedly, download can be used;
- 自动调整袋长，不需人工设置；
  Automatically adjust the bag length, without manual setting;
- 精度更高，封切位置准确；
  Higher precision, sealing and cutting position is accurate;
- 停机位置，打印位置可任意设置；
  The stop position and printing position can be set arbitrarily;
- 机械结构简单，调试方便直观，售后维护成本低；
  Simple mechanical structure, convenient debugging and intuitive, low after-sales maintenance cost;
- 包装范围扩宽，适应多种产品规格；
  The packaging range is expanded to adapt to a variety of product specifications;
- 符合人体工程力学的结构布局，可方便迅速对机器进行卫生清理，保养，维护，检修；
  In line with the structure of human engineering mechanics, can be convenient to quickly cleaning, maintenance, overhaul of the machine;
- 降低操作者的劳动强度，有效提高生产效率。
  Reduce the labor intensity of the operator, effectively improve production efficiency.

SZ-1000Plus
三伺服智能枕式包装机

下走膜进料/应用场景广泛

最高包装速度
120包/分钟

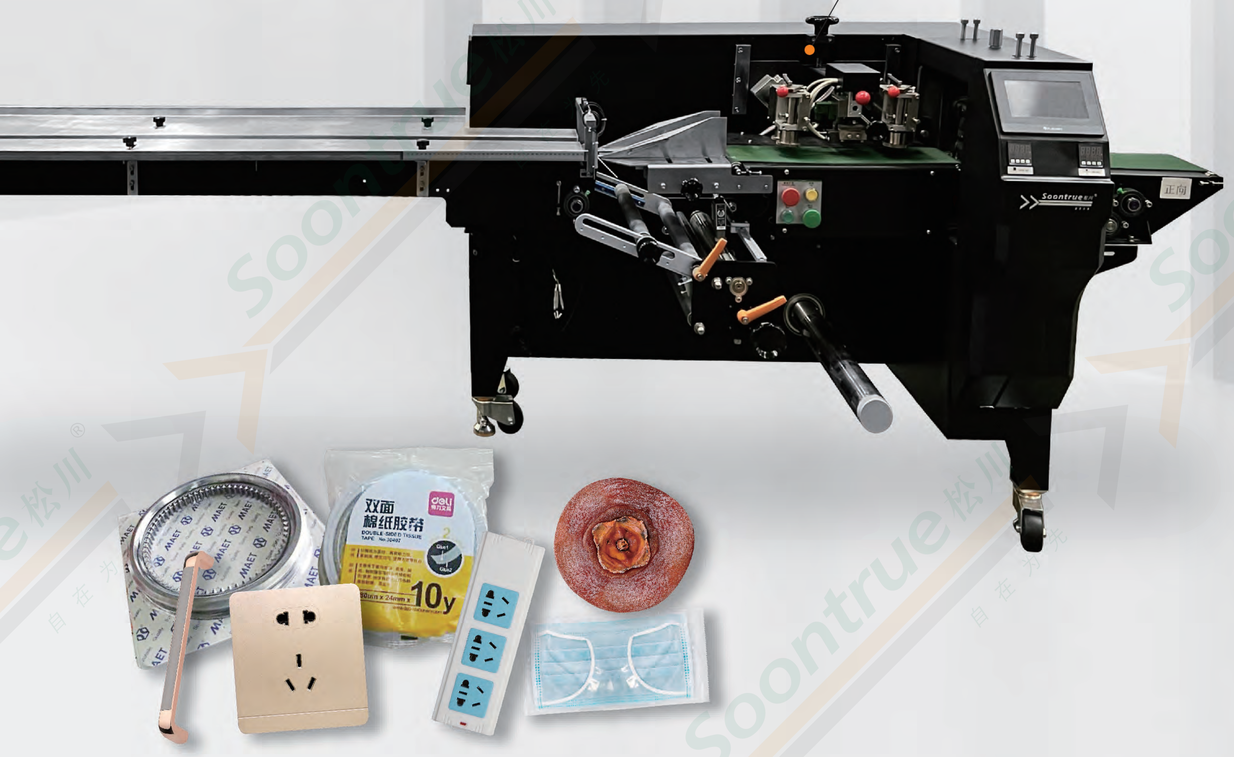

适用物料 APPLCAITION

适用于包各位不规则物品机固态物体。针对五金、电器、开关、小商品、日化、化工等行业。

It is suitable for packing irregular articles and solid objects. For hardware, electrical appliances, switches, small commodities, daily chemical, chemical and other industries.

三伺服智能枕式包装机 SZ-1000Plus
SERVO INTELLIGENT PILLOW TYPE PACKING MACHINE

技术参数 TECHNICAL PARAMETERS

型号 Model	SZ-1000p(单刀/Single jaw)
包装规格长 Package length	120~500 mm
包装规格宽 Package width	35~140 mm
包装规格高 Package height	5~60 mm
包装速度 Packing speed	30~120 bags/min
包装膜宽 Film size	90~400 mm
包装膜类型 Packaging film type	PP、PE、PVC、PS、EVA、PET、PVDC+PVC、OPP+复合CPP等
电源类型 Type of power supply	220V 50HZ
总功率 General power	2.8 Kw
整机重量 Weight	340 Kg
机身尺寸（含尾架）Dimension	3590×960×1080 mm

性能特点 PERFORMANCE CHARACTERISTICS

- 整机由三个伺服控制；
  The whole machine is controlled by three servos;
- 七寸触摸屏显示，操作简易，工作状态清晰明了；
  Seven-inch touch screen display, easy operation and clear working status;
- 可以存储多种产品参数和配方，不需重复设置，下载即可使用；
  A variety of product parameters and formulas can be stored, which can be downloaded and used without repeated settings;
- 自动调整袋长，不需人工设置；
  Automatic adjustment of bag length without manual setting;
- 精度更高，封切位置准确；
  Higher precision and accurate sealing and cutting position;
- 停机位置，打印位置可任意设置；
  Stop position and print position can be set arbitrarily;
- 机械结构简单，调试方便直观，售后维护成本低；
  Simple mechanical structure, convenient and intuitive debugging and low after-sales maintenance cost;
- 包装范围扩宽，适应多种产品规格；
  The packaging range is expanded to adapt to a variety of product specifications;
- 符合人体工程力学的结构布局，可方便迅速对机器进行卫生清理，保养，维护，检修；
  In line with the structure of human engineering mechanics, can be convenient to quickly clean up, maintenance, overhaul of the machine;
- 降低操作者的劳动强度，有效提高生产效率。
  Reduce the labor intensity of the operator, effectively improve production efficiency.

SZ-3000
三伺服智能枕式包装机

下走膜进料/应用场景广泛

适用物料 APPLCAITION

适用于包装各类不规则物品、粘性物品及固态物体。1、食品类：挂面、蛋卷、香肠、鱿鱼、面包、月饼、果脯、软糖等；2、化工类：香皂、胶带等；3、电器开关：插线板、开关等；4、其他类：风油精、袖珍记事本、盒装钢笔、药品等。

It is suitable for packing all kinds of irregular articles, sticky articles and solid objects.
1、Food: noodles, egg rolls, sausages, squid, bread, moon cakes, preserved fruit, soft candy, etc.
2、chemical categories: soap, tape, etc.;
3、electrical switch: plug board, switch, etc.;
4、 Other categories: wind oil essence, pocket notepad, boxed pen, medicine, etc.

三伺服智能枕式包装机 SZ-3000
SERVO INTELLIGENT PILLOW TYPE PACKING MACHINE

技术参数 TECHNICAL PARAMETERS

型号 Model	SZ-3000(单刀/Single jaw)	SZ-3000(双刀/Double jaws)
包装规格长 Package length	120~500 mm	60~350 mm
包装规格宽 Package width	35~160 mm	35~160 mm
包装规格高 Package height	5~60 mm	5~60 mm
包装速度 Packing speed	30~120 bags/min	30~250 bags/min
包装膜宽 Film size	90~400 mm	90~400 mm
包装膜类型 Packaging film type	PP、PE、PVC、PS、EVA、PET、PVDC+PVC、OPP+复合CPP等	
电源类型 Type of power supply	220V 50HZ	220V 50HZ
总功率 General power	3.1 Kw	3.8 Kw
整机重量 Weight	350 Kg	350 Kg
机身尺寸（含尾架）Dimension	4100×770×1100 mm	

性能特点 PERFORMANCE CHARACTERISTICS

- 整机由三个伺服控制；
  The whole machine is controlled by three servos;
- 七寸触摸屏显示，操作简易，工作状态清晰明了；
  Seven-inch touch screen display, easy operation and clear working status;
- 可以存储多种产品参数和配方，不需重复设置，下载即可使用；
  A variety of product parameters and formulas can be stored, which can be downloaded and used without repeated settings;
- 自动调整袋长，不需人工设置；
  Automatic adjustment of bag length without manual setting;
- 精度更高，封切位置准确；
  Higher precision and accurate sealing and cutting position;
- 停机位置，打印位置可任意设置；
  Stop position and print position can be set arbitrarily;
- 机械结构简单，调试方便直观，售后维护成本低；
  Simple mechanical structure, convenient and intuitive debugging and low after-sales maintenance cost;
- 包装范围扩宽，适应多种产品规格；
  The packaging range is expanded to adapt to a variety of product specifications;
- 符合人体工程力学的结构布局，可方便迅速对机器进行卫生清理，保养，维护，检修；
  In line with the structure of human engineering mechanics, can be convenient to quickly clean up, maintenance, overhaul of the machine;
- 降低操作者的劳动强度，有效提高生产效率。
  Reduce the labor intensity of the operator, effectively improve production efficiency.

SZ-580
五伺服高速智能枕式包装机

高精高速/封切精美

适用物料 APPLCAITION

适用于烘焙食品（月饼、面包、饼干等）、医疗器械、糖果、药品、日用品、五金零件、纸盒或托盘等各类固态有规则物体的包装。

It is suitable for baking food (moon cake, bread, biscuit, etc.), medical equipment, candy, medicine, daily necessities, hardware parts, paper box or tray and other solid and regular packing.

五伺服高速智能枕式包装机 SZ-580
SERVO HIGH SPEED INTELLIGENT PILLOW PACKING MACHINE

技术参数 TECHNICAL PARAMETERS

型号 Model	90中心距三刀	117中心距双刀	132中心距双刀	150中心距双刀
包装规格长 Package length	45~100 mm	60~280 mm	60~350 mm	120~400 mm
包装规格宽 Package width	35~60 mm	35~160 mm	35~160 mm	35~160 mm
包装规格高 Package height	5~30 mm	5~45 mm	5~60 mm	5~70 mm
包装速度 Packing speed	30~500 bags/min	30~350 bags/min	30~350 bags/min	30~350 bags/min
包装膜宽 Film size	90~400 mm	90~400 mm	90~400 mm	90~400 mm
包装膜类型 Packaging film type	PP、PVC、PE、PS、EVA、PET、PVDC+PVC等			
电源类型 Type of power supply	220V 50HZ	220V 50HZ	220V 50HZ	220V 50HZ
总功率 General power	7 Kw	7.7 Kw	7.7 Kw	7.7 Kw
整机重量 Weight	540 Kg	540 Kg	540 Kg	540 Kg
机身尺寸（含尾架）Dimension	4200×970×1640 mm			

性能特点 PERFORMANCE CHARACTERISTICS

- 整机全系标配工业PC控制，动力驱动标配五个优质伺服系统；
  The whole machine is standard with industrial PC control, and the power drive is standard with five high-quality servo systems;
- 七寸触摸屏显示，操作简易，工作状态清晰明了；
  7-inch touch screen display, easy to operate, clear working state;
- 可存储多种产品参数和配方，不需重复设置，下载即可使用；
  Can store a variety of product parameters and formulas, do not need to set repeatedly, download can be used;
- 自动调整袋长，不需人工设置；
  Automatically adjust the bag length, without manual setting;
- 精度更高，封切位置准确；
  Higher precision, sealing and cutting position is accurate;
- 停机位置，打印位置可任意设置；
  Stop position and print position can be set arbitrarily;
- 机械结构简单，调试方便直观，售后维护成本低；
  Simple mechanical structure, convenient and intuitive debugging, low after-sales maintenance cost;
- 包装范围扩宽，适应多种产品规格；
  The packaging range is expanded to adapt to a variety of product specifications;
- 符合人体工程力学的结构布局，可方便迅速对机器进行卫生清理，保养，维护，检修；
  In line with the structure of human engineering mechanics, can be convenient to quickly clean up, maintenance, overhaul of the machine;
- 降低操作者的劳动强度，有效提高生产效率。
  Reduce the labor intensity of the operator, effectively improve production efficiency.

SZ-280
三伺服智能枕式包装机

大幅膜宽/操作简单

适用物料 APPLCAITION

适用物料：适用于大规格产品，如托盒水饺、云吞、汤圆等速冻产品，以及多个或单个散装包子、馒头等面点食品，大规格面包、汉堡等各类固态有规则物体的包装。

Application: medium and large size packaging of various solid and regular objects. For example: medium and large tray products, such as dumplings, wonton, dumplings, quick-frozen food, sea food; single or multiple bulk steamed buns, steamed buns, pancakes, croissants, hamburgers, bread and other solid foods.

三伺服智能枕式包装机 SZ-280
SERVO INTELLIGENT PILLOW TYPE PACKING MACHINE

技术参数 TECHNICAL PARAMETERS

型号 Model	SZ-280
中心距 Center distance	150/192 mm
包装规格长 Package length	120~500 mm
包装规格宽 Package width	200 mm（最大/maximum）
包装规格高 Package height	80/110 mm（最大/maximum）
包装速度 Packing speed	25~120 bags/min
包装膜宽 Film size	200-600 mm
包装膜类型 Packaging film type	OPP、PVC、PE、OPP/CPP、PT/PE、KOP/CPP等
电源类型 Type of power supply	220V 50HZ
总功率 General power	4.7 Kw
整机重量 Weight	550 Kg
机身尺寸（含尾架）Dimension	4260×1130×1400 mm

性能特点 PERFORMANCE CHARACTERISTICS

- 整机由三个伺服控制；
  The whole machine is controlled by three servos;
- 整机包装范围超大，适用包装各类大规格、大尺寸产品；
  The machine packaging range is large, suitable for packaging all kinds of large specifications, large size products;
- 七寸触摸屏显示，操作简易，工作状态清晰明了；
  Seven-inch touch screen display, easy operation and clear working status;
- 可以存储多种产品参数和配方，不需重复设置，下载即可使用；
  Can store a variety of product parameters and formulations, do not need to set repeatedly, download can be used;
- 自动调整袋长，无需人工设置；
  Automatically adjust the bag length without manual setting;
- 整机更高精度，封切位置准确无误；
  The machine has higher precision, sealing and cutting position is accurate;
- 停机位置、打码位置可任意在触摸屏内设置，点击即可，方便快捷；
  Stop position, coding position can be set in the touch screen, click, convenient and fast;
- 机械结构简单，调试方便直观，售后维护成本低；
  Simple mechanical structure, convenient debugging and intuitive, low after-sales maintenance cost.

SZ280XW
三伺服往复式智能枕式大包机

下走膜进料/大幅膜宽/操作简单

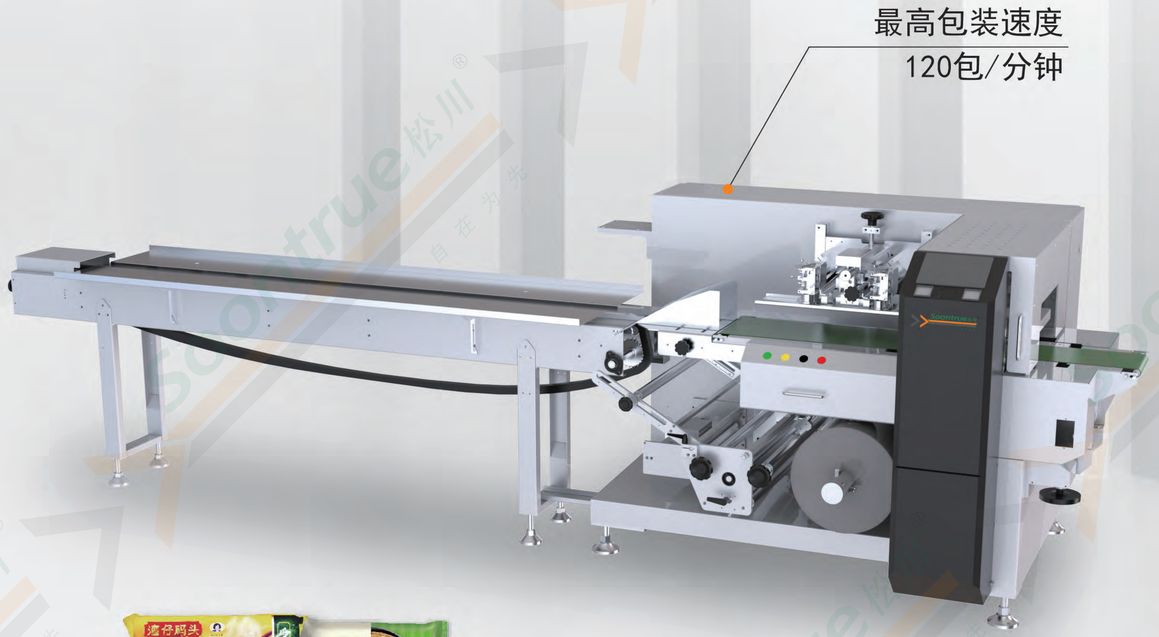

适用物料 APPLCAITION

适用物料：适用于烘焙类食品、面点、速冻产品、多小包组合等大规格产品的包装。

Application: packaging of single or multiple irregular baked foods, pastries, quick-frozen products, multi packet combination and other large-scale products.

三伺服往复式智能枕式大包机 SZ280XW
SERVO INTELLIGENT PILLOW TYPE PACKING MACHINE

技术参数 TECHNICAL PARAMETERS

型号 Model	SZ-280XW
中心距 Center distance	120/160 mm
包装规格长 Package length	120~500 mm
包装规格宽 Package width	250 mm（最大/maximum）
包装规格高 Package height	110/150 mm（最大/maximum）
包装速度 Packing speed	25~100 bags/min
包装膜宽 Film size	200-600 mm
包装膜类型 Packaging film type	OPP、PVC、PE、OPP/CPP、PT/PE、KOP/CPP等
电源类型 Type of power supply	220V 50HZ
总功率 General power	4.7 Kw
整机重量 Weight	675 Kg
机身尺寸（含尾架）Dimension	4240×1249×1160 mm

性能特点 PERFORMANCE CHARACTERISTICS

- 整机由三个伺服控制；
  The whole machine is controlled by three servos;
- 下走膜进料，往复式刀封机构；
  Lower film feeding, reciprocating knife sealing mechanism;
- 七寸触摸屏显示，操作简易，工作状态清晰明了；
  Seven-inch touch screen display, easy operation and clear working status;
- 可以存储多种产品参数和配方，不需重复设置，下载即可使用；
  Can store a variety of product parameters and formulas, do not need to set repeatedly, download can be used;
- 自动调整袋长，无需人工设置；
  Automatically adjust the bag length without manual setting;
- 整机更高精度，封切位置准确无误；
  The machine has higher precision, sealing and cutting position is accurate;
- 停机位置、打码位置可任意在触摸屏内设置，点击即可，方便快捷；
  Stop position, coding position can be set in the touch screen, click, convenient and fast;
- 机械结构简单，调试方便直观，售后维护成本低。
  Simple mechanical structure, convenient debugging and intuitive, low after-sales maintenance cost.

SZ-601
八伺服智能枕式包装机

下走膜进料/包装范围更大

最高包装速度
100包/分钟

适用物料 APPLCAITION

适用于更大尺寸的不带托盒手抓饼、面饼等食品，以及各类不规则、松软物体的包装。

It is suitable for packaging larger size shredded cake, bread and other foods, as well as all kinds of irregular and soft objects.

八伺服智能枕式包装机 SZ-601
SERVO INTELLIGENT PILLOW TYPE PACKING MACHINE

技术参数 TECHNICAL PARAMETERS

型号 Model	SZ-601
中心距 Center distance	150/192 mm
包装规格长 Package length	120~600 mm
包装规格宽 Package width	250 mm（最大/maximum）
包装规格高 Package height	120 mm（最大/maximum）
包装速度 Packing speed	25~120 bags/min
包装膜宽 Film size	600 mm
包装膜类型 Packaging film type	OPP、PVC、PE、OPP/CPP、PT/PE、KOP/CPP等
电源类型 Type of power supply	220V 50HZ
总功率 General power	8.0 Kw
整机重量 Weight	900 Kg
机身尺寸 Dimension	5055×1425×1485 mm

性能特点 PERFORMANCE CHARACTERISTICS

- 整机由八个伺服控制；
  The whole machine is controlled by eight servos;
- 整机包装范围超大，适用包装各类大规格、大尺寸产品；
  The machine packaging range is large, suitable for packaging all kinds of large specifications, large;
- 十寸触摸屏显示，操作简易，工作状态清晰明了；
  Ten-inch touch screen display, easy to operate, clear working state;;
- 可以存储多种产品参数和配方，不需重复设置，下载即可使用；
  Can store a variety of product parameters and formulations, do not need to set repeatedly, download can be used;
- 自动调整袋长，无需人工设置；
  Automatically adjust the bag length without manual setting;
- 整机更高精度，封切位置准确无误；
  The machine has higher precision, sealing and cutting position is accurate;
- 停机位置、打码位置可任意在触摸屏内设置，点击即可，方便快捷；
  Stop position, coding position can be set in the touch screen, click, convenient and fast;
- 机械结构简单，调试方便直观，售后维护成本低。
  Simple mechanical structure, convenient debugging and intuitive, low after-sales maintenance cost.

SZ-601W
九伺服往复式智能枕式包装机

往复式刀封/下走膜进料

适用物料 APPLCAITION

适用于大规格巧克力、面饼、多小包组合的沙琪玛、多小包组合的烘焙蛋糕等大规格产品的包装。

It is suitable for packaging large size products such as large size chocolate, pastry, multi-small package combination of saqima, multi-small package combination of baked cake and so on.

九伺服往复式智能枕式包装机 SZ-601W

SERVO INTELLIGENT PILLOW TYPE PACKING MACHINE

技术参数 TECHNICAL PARAMETERS

型号 Model	SZ-601W
中心距 Center distance	120/160 mm
包装规格长 Package length	120~600 mm
包装规格宽 Package width	250 mm（最大/maximum）
包装规格高 Package height	120 mm（最大/maximum）
包装速度 Packing speed	20~80 bags/min
包装膜宽 Film size	600 mm
包装膜类型 Packaging film type	OPP、PVC、PE、OPP/CPP、PT/PE、KOP/CPP等
电源类型 Type of power supply	220V 50HZ
总功率 General power	9.0 Kw
整机重量 Weight	1000 Kg
机身尺寸 Dimension	5350×1230×1470 mm

性能特点 PERFORMANCE CHARACTERISTICS

- 整机由九个伺服控制；
  The machine is controlled by nine servos;
- 刀封为往复式结构，封口平整美观；
  the cutter seal for reciprocating structure, sealing smooth and beautiful;
- 十寸触摸屏显示，操作简易，工作状态清晰明了；
  The machine packaging range is large, suitable for packaging all kinds of large specifications, large size products;
- 可以存储多种产品参数和配方，不需重复设置，下载即可使用；
  Can store a variety of product parameters and formulas, do not need to set repeatedly, download can be used;
- 自动调整袋长，无需人工设置；
  Automatically adjust the bag length without manual setting;
- 整机更高精度，封切位置准确无误；
  The machine has higher precision, sealing and cutting position is accurate;
- 停机位置、打码位置可任意在触摸屏内设置，点击即可，方便快捷；
  Stop position, coding position can be set in the touch screen, click, convenient and fast;
- 机械结构简单，调试方便直观，售后维护成本低。
  Simple mechanical structure, convenient debugging and intuitive, low after-sales maintenance cost.

SZ-602
七伺服智能枕式包装机

包装范围更大/操作便捷简单

适用物料 APPLCAITION

适用于大部分带托盒水饺、云吞、包子、汤圆等速冻食品，以及多个或单个散装包子、馒头、汉堡、面包、蛋糕、纸盒等各类固态有规则物体的包装。

It is suitable for packing most frozen food such as dumpling, wonton, steamed stuffed bun, dumpling and so on, as well as multiple or single bulk steamed stuffed bun, steamed bun, hamburger, bread, cake, paper box and other solid regular objects.

七伺服智能枕式包装机 SZ-602

SERVO INTELLIGENT PILLOW TYPE LARGE CHARTER AIRCRAFT

技术参数 TECHNICAL PARAMETERS

型号 Model	SZ-602
中心距 Center distance	150/192 mm
包装规格长 Package length	120~600 mm
包装规格宽 Package width	250 mm（最大/maximum）
包装规格高 Package height	120 mm（最大/maximum）
包装速度 Packing speed	25~120 bags/min
包装膜宽 Film size	600 mm（最大/maximum）
包装膜类型 Packaging film type	OPP、PVC、PE、OPP/CPP、PT/PE、KOP/CPP镀铝膜、铝膜等
电源类型 Type of power supply	220V 50HZ
总功率 General power	7.6 Kw
整机重量 Weight	800 Kg
机身尺寸（含尾架）Dimension	4500×1180×1590 mm

性能特点 PERFORMANCE CHARACTERISTICS

- 整机由七个伺服控制；
  The whole machine is controlled by seven servos;
- 整机包装范围超大，适用包装各类大规格、大尺寸产品；
  The machine packaging range is large, suitable for packaging all kinds of large specifications, large size products;
- 十寸触摸屏显示，操作简易，工作状态清晰明了；
  Ten-inch touch screen display, easy to operate, clear working state;
- 可以存储多种产品参数和配方，不需重复设置，下载即可使用；
  Can store a variety of product parameters and formulations, do not need to set repeatedly, download can be used;
- 自动调整袋长，无需人工设置；
  Automatically adjust the bag length without manual setting;
- 整机更高精度，封切位置准确无误；
  The machine has higher precision, sealing and cutting position is accurate;
- 停机位置、打码位置可任意在触摸屏内设置，点击即可，方便快捷；
  Stop position, coding position can be set in the touch screen, click, convenient and fast;
- 机械结构简单，调试方便直观，售后维护成本低；
  Simple mechanical structure, convenient debugging and intuitive, low after-sales maintenance cost.

SZ-602W
八伺服往复式智能枕式包装机

高精高速/包装范围更大

适用物料 APPLCAITION

适用于大部分带托盒水饺、云吞、包子、汤圆等速冻食品，以及多个或单个散装包子、馒头、汉堡、面包、蛋糕、纸盒等各类固态有规则物体的包装。

It is suitable for packing most frozen food such as dumpling, wonton, steamed stuffed bun, dumpling and so on, as well as multiple or single bulk steamed stuffed bun, steamed bun, hamburger, bread, cake, paper box and other solid regular objects.

八伺服往复式智能枕式包装机 SZ-602W

SERVO INTELLIGENT RECIPROCATING PILLOW TYPE LARGE CHARTER AIRCRAFT

技术参数 TECHNICAL PARAMETERS

型号 Model	SZ-602W
中心距 Center distance	120/160 mm
包装规格长 Package length	120~600 mm
包装规格宽 Package width	250 mm（最大/maximum）
包装规格高 Package height	120 mm（最大/maximum）
包装速度 Packing speed	20~80 bags/min
包装膜宽 Film size	600 mm
包装膜类型 Packaging film type	OPP、PVC、PE、OPP/CPP、PT/PE、KOP/CPP镀铝膜、铝膜等
电源类型 Type of power supply	220V 50HZ
总功率 General power	8.6 Kw
整机重量 Weight	1000 Kg
机身尺寸（含尾架）Dimension	4600×1275×1590 mm

性能特点 PERFORMANCE CHARACTERISTICS

- 整机由八个伺服控制；
  The whole machine is controlled by eight servos;
- 刀封为往复式结构，封口平整美观；
  The cutter seal for reciprocating structure, sealing smooth and beautiful;
- 整机包装范围超大，适用包装各类大规格、大尺寸产品；
  The machine packaging range is large, suitable for packaging all kinds of large specifications, large size products;
- 十寸触摸屏显示，操作简易，工作状态清晰明了；
  Ten inch touch screen display, easy to operate, clear working state;
- 可以存储多种产品参数和配方，不需重复设置，下载即可使用；
  Can store a variety of product parameters and formulas, do not need to set repeatedly, download can be used;
- 自动调整袋长，无需人工设置；
  Automatically adjust the bag length without manual setting;
- 整机更高精度，封切位置准确无误；
  The machine has higher precision, sealing and cutting position is accurate;
- 停机位置、打码位置可任意在触摸屏内设置，点击即可，方便快捷；
  Stop position, coding position can be set in the touch screen, click, convenient and fast;
- 机械结构简单，调试方便直观，售后维护成本低；
  Simple mechanical structure, convenient and intuitive debugging, low after-sales maintenance cost.

SZ-801W
七伺服往复式大袋包装机

往复式刀封/下走膜进料/包装范围超大

适用物料 APPLCAITION

适用于大规格巧克力、面饼、多小包组合的沙琪玛、多小包组合的烘焙蛋糕等大规格产品的包装。

It is suitable for the packaging of large size products such as large size chocolate, pastry, multi-small package combination of saqima, multi-small package combination of baked cake and so on.

七伺服往复式大袋包装机 SZ-801W
SERVO INTELLIGENT PILLOW TYPE BIG BAG PACKING MACHINE

技术参数 TECHNICAL PARAMETERS

型号 Model	SZ-801W
中心距 Center distance	160 mm
包装规格长 Package length	150~600 mm
包装规格宽 Package width	350 mm（最大/maximum）
包装规格高 Package height	140 mm（最大/maximum）
包装速度 Packing speed	20-70 bags/min
包装膜宽 Film size	900 mm
包装膜类型 Packaging film type	OPP、PE、PVC、OPP/CPP、PT/PE、KOP/CPP等
电源类型 Type of power supply	220V 50HZ
总功率 General power	7.5 Kw
整机重量 Weight	1500 Kg
机身尺寸（含尾架）Dimension	5215×1560×1537 mm

性能特点 PERFORMANCE CHARACTERISTICS

- 整机由七个伺服控制；
  The whole machine is controlled by seven servos;
- 刀封为往复式结构，封口平整美观；
  The cutter seal for reciprocating structure, sealing smooth and beautiful;
- 整机包装范围超大，适用包装各类大规格、大尺寸产品；
  The machine packaging range is large, suitable for packaging all kinds of large specifications, large size products;
- 十寸触摸屏显示，操作简易，工作状态清晰明了；
  Ten inch touch screen display, easy to operate, clear working;
- 可以存储多种产品参数和配方，不需重复设置，下载即可使用；
  Can store a variety of product parameters and formulas, do not need to set repeatedly, download can be used;
- 自动调整袋长，无需人工设置；
  Automatically adjust the bag length without manual setting;
- 整机更高精度，封切位置准确无误；
  The machine has higher precision, sealing and cutting position is accurate;
- 停机位置、打码位置可任意在触摸屏内设置，点击即可，方便快捷；
  stop position, coding position can be set in the touch screen, click, convenient and fast;
- 机械结构简单，调试方便直观，售后维护成本低。
  Simple mechanical structure, convenient and intuitive debugging, low after-sales maintenance cost.

SP-WS0810机器人智能分拣工作站

该工作站采用800mm工作空间蜘蛛手机器人，圆形三足机架，配合输送带及枕式包装机，布局紧凑，占地空间小，能代替1-2名人工实现智能高效的分拣放料。适用于各类食品、医药、日化、五金、电器等产品的一次包装，是包装机的好搭档，可以把工人从粗糙的流水线解放出来，为工厂节约成本，提升效率。

产品整齐排列来料或分散来料 → 皮带线输送 → 视觉拍照定位 → 机器人跟踪抓取 → 机器人追踪尾架放料 → 产品进入包装机进行一次包装。

系统技术参数

型号	SP-WS0810机器人智能分拣工作站
抓放速度	80-160 片/min
适用产品重量	5-50 g/片
整机重量	600 Kg
外形尺寸	L 4400 x W 1550 x 2250 mm

附: 具体参数视客户现场情况而定



分拣单元

视觉单元

放料单元

SZ180R纸巾自动理料包装线

棉柔巾理料包装系统主要由输送单元、理料定位单元、进料尾架、包装机组成。

系统通过整理输送单元，对物料进行柔性分流、整理排队，输送至伺服理料尾架单元将产品有序、顺畅、无损伤地送入包装机完成包装。

系统技术参数

型号	SZ180R纸巾自动理料包装线
包装速度	30-150 包/min
成袋尺寸	长100-350；宽46-160；高10-50mm
整机重量	420 Kg
外形尺寸	L 6720 x W 920 x 1400 mm

附: 具体参数视客户现场情况而定

虚线撕裂口单元

理料单元

加长输送单元

自动装托理料包装系统（月饼、榴莲饼）

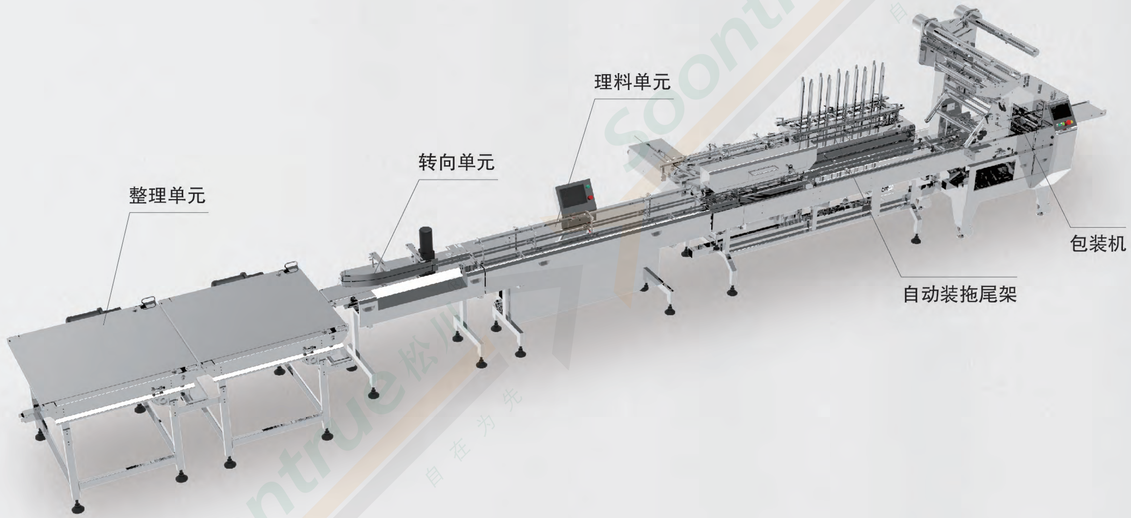

自动装托理料包装系统由整理输送单元，转向单元、理料尾架单元、包装机，标识系统组成。

系统通过在整理单元，对物料进行柔性整理，排序；自动分拖装置将产品的托盒进行单个排料配合伺服理料单元将产品有序、顺畅、无损伤地送入托盒内，配合投包机连带脱氧剂一起进入包装机现实全自动包装。

系统技术参数

型号	自动装托理料包装系统一拖一
包装速度	35–150bags/min
占地尺寸	9000×1800×800mm
电器总功率	4.5kw
电源类型	220V 50HZ

附: 具体参数视客户现场情况而定

输送单元

理料单元

自动装托单元

威化类理料包装系统（单片、多片）

自威化类理料包装系统主要由整理输送单元，伺服推板单元，90度尾架单元，包装机，标识系统组成。

系统主要连接前端生产线，通过整理输送单元将产品分成一排一排，拉开距离，伺服推板通过电眼自动检测到产品，柔性将产品推到90度尾架单元，进入包装机实现全自动包装。

系统技术参数

型号	威化类理料包装系统一拖三
包装速度	35–300bags/min×3
占地尺寸	13000×2500×1600mm
电器总功率	4kw×3
电源类型	220V 50HZ

附: 具体参数视客户现场情况而定

推板单元

输送单元

过渡输送单元

米果类理料包装系统

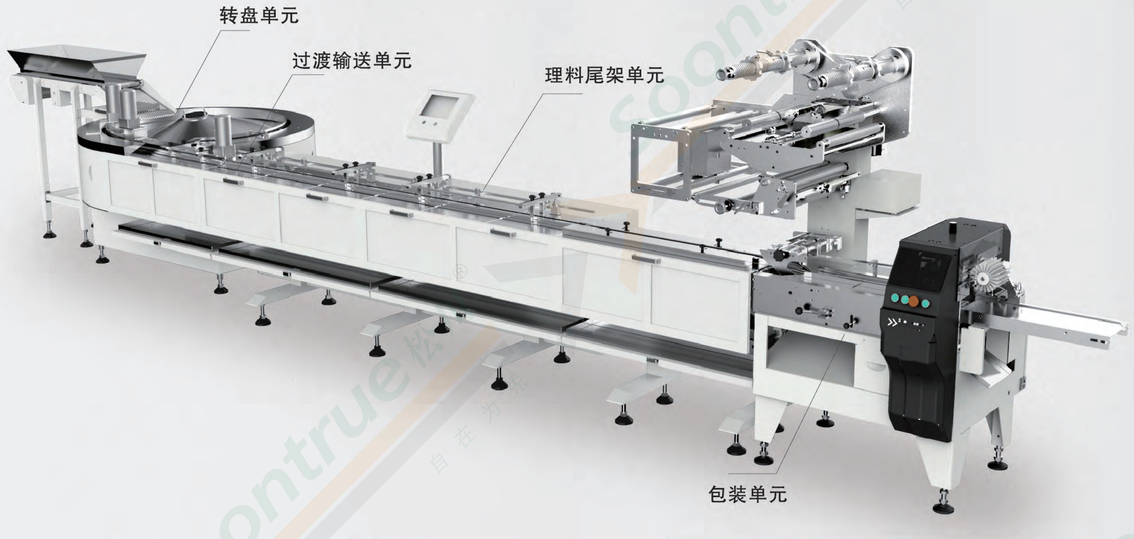

米果类理料包装系统主要由自动进料单元、转盘单元、多级理料单元、、叠层机构、包装机，标识系统组成。

系统主要针对成堆产品无序来料，通过自动进料单元控制相对均匀来料，通过转盘单元将产品整理成单列产品到伺服理料尾架单元，通过多级理料进入包装机完成包装，叠层机构可实理上下两片包装，如雪米饼、仙贝类。

系统技术参数

型号	米果类理料包装系统一拖一
包装速度	35–300bags/min
占地尺寸	6000×1500×1600mm
电器总功率	5.5KW
电源类型	220V 50HZ

附: 具体参数视客户现场情况而定

转盘理料单元

过渡输送单元

理料定位单元

糕点类理料包装系统（装托，不装托二合一）

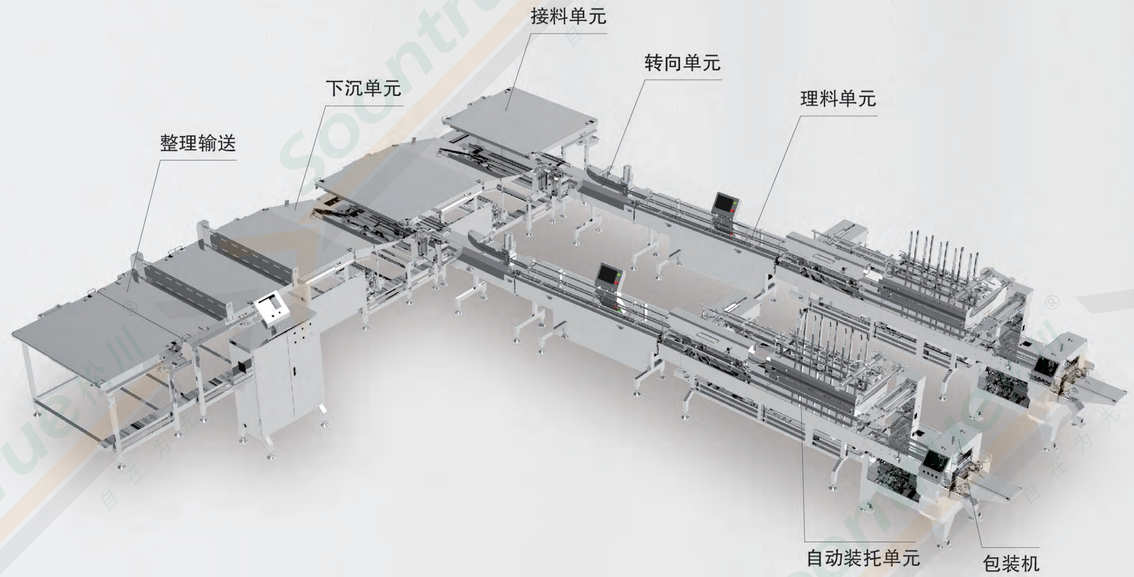

糕点理料包装系统由整理输送单元，下沉单元、接料单元、转向单元、理料尾单元、开托单元、装托单元、包装机、标识系统组成。

系统主要针对此类产品松软特性，实现产品装托盒以及不装托盒二合一理料包装；通过多段整理单元上的多段变速，将产横向间距加大，挡齐单元将物料进入接料单元前整齐排料，下沉单元通过上下移动将产品送入接料单元；自动分拖装置将产品的托盒进行单个排料配合伺服理料单元将产品有序、顺畅、无损伤地送入托盒内，配合投包机连带脱氧剂一起进入包装机现实全自动包装；也可以直接配合伺服理料单元将产品有序、顺畅、无损伤地送入包装机完成包装。

系统技术参数

型号	糕点类理料包装系统一拖二
包装速度	35–150bags/min×2
占地尺寸	9000×6500×1000mm
电器总功率	4.5kw×2
电源类型	220V 50HZ

附: 具体参数视客户现场情况而定

输送单元

抽拉式接料单元

自动装托单元

瑞士卷、沙琪玛类理料包装系统

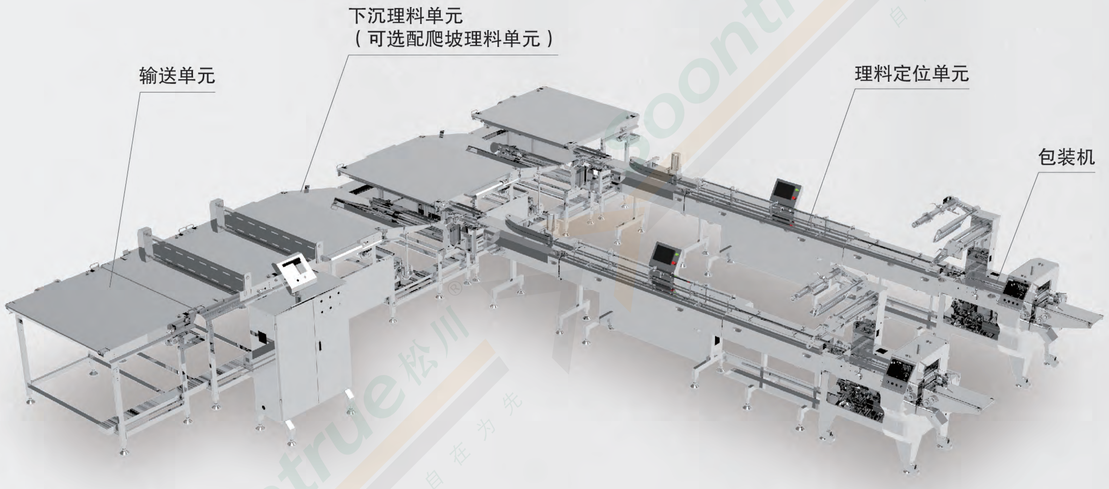

瑞士卷、沙琪玛类理料包装系统由整理输送单元，下沉单元、接料单元、转向单元、理料尾架单元、包装机，标识系统组成。

系统主要针对沙琪玛粘性强的特性，通过在整理单元上的分离，将产品分离成排，下沉单元通过上下移动将产品送入接料单元，再由特制双皮带转向单元，分离机构将产品转向分开单个产品，通过伺服理料尾架单元将产品有序、顺畅、无损伤地进入包装机完成包装。本系统由于产品粘性，全套系统均做防粘防糖浆处理。

系统技术参数

型号	瑞士卷、沙琪玛理料包装系统一拖三
包装速度	35–160bags/min×3
占地尺寸	8500×1400×1000mm
电器总功率	4.5kw×3
电源类型	220V 50HZ

附: 具体参数视客户现场情况而定

输送单元

下沉理料单元



理料定位单元

蛋糕、面包类理料包装系统（可投脱氧剂）

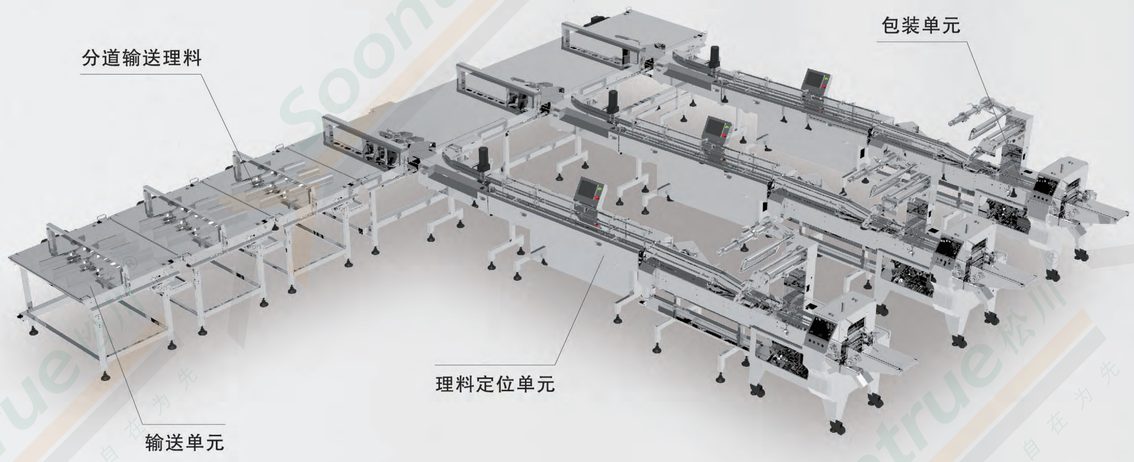

蛋糕、面包类理料包装系统主要由整理输送单元，挡料单元，转向单元，包装机，标识系统组成。

系统通过整理输送单元，对物料进行柔性分流、整理排队；挡料单元将产品分配到预设定的各道接料单元，通过伺服理料尾架单元将产品有序、顺畅、无损伤地进入包装机完成包装，面包类产品可通过翻转单元完成翻面。

系统技术参数

型号	蛋糕、面包类理料包装系统一拖三
包装速度	35–150bags/min×3
占地尺寸	6500×6000×1600mm
电器总功率	5KW×3
电源类型	220V 50HZ

附: 具体参数视客户现场情况而定

1. 2米Y型尾架

分道输送理料单元

理料定位单元

双通道饼干理料包装系统

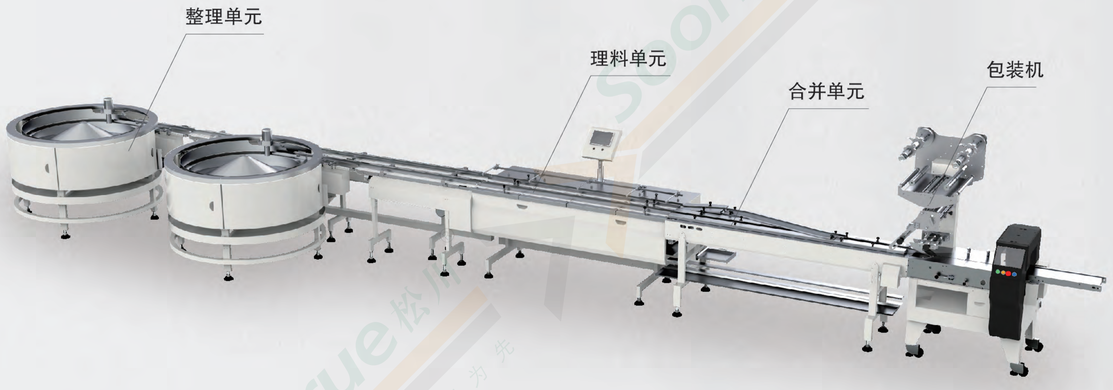

双通道饼干理料包装系统由整理输送单元、接料单元、转向单元、理料尾架单元、包装机，标识系统组成。

系统主要针对饼干高速叠层的需要，通过在转盘或输送上的整理，将产品分离成排，再由过渡输送，通过伺服理料，合并尾架单元将产品有序、顺畅、无损伤地进入包装机完成叠层包装，实现高速、稳定生产。

系统技术参数

型号	双通道饼干理料包装
包装速度	35–400bags/min
占地尺寸	9900 × 1900 × 800mm
电器总功率	5kw
电源类型	220V 50HZ

附: 具体参数视客户现场情况而定

转盘理料单元

合并单元

理料双通道单元

饼干理料包装系统（夹心）

饼干理料包装系统主要由主线输送单元、落饼器、震动（皮带）输送单元、伺服推饼单元、包装机、标识系统组成。

系统通过连接饼干生产线冷却部分，自动整理产品进入落饼器，再经过伺服推饼机构将产品有序、顺畅、无损伤地送入包装机进行完成包装，实现多品种饼干规格、多片数包装，可根据需要搭配饼干夹心机。

系统技术参数

型号	（夹心）饼干理料包装系统
包装速度	30–500bags/min × 2
占地尺寸	9500 × 4500 × 1300mm
电器总功率	2.5kw × 2
电源类型	220V 50HZ

附: 具体参数视客户现场情况而定

主输送单元

伺服推饼机构

理料单元